




63





603



45CF

3½ Digit 2,000 Count LCD Audible Continuity, Data Hold Diode, hFE Test & Backlight Display Ranges	
<b>DC Voltage</b>	200mV/2/20/200/1000V
Accuracy	± (0.5%rdg + 1dgt) on all ranges
<b>AC Voltage</b>	200/750V (50-500Hz)
Accuracy	± (1%rdg + 4dgt) on 200V ± (1.5%rdg + 4dgt) on 750V
<b>DC Current</b>	200µA/2mA/20mA/ 200mA/10A
Accuracy	± (1%rdg + 1dgt) on all ranges except ± (2%rdg + 3dgt) on 10A
<b>Resistance</b>	200Ω/2kΩ/20kΩ/200kΩ /2MΩ
Accuracy	± (0.8%rdg + 1dgt) on all ranges, except ± (1%rdg + 3dgt) on 200Ω
<b>Sp. Function</b>	Audible Continuity, Diode Check, hFE Test Data Hold & Backlight Display
<b>Power</b>	One 9V battery
<b>Low Battery</b>	"  " is indicated
<b>Battery Life</b>	200 hours typical
<b>Dimensions</b>	145 x 70 x 35 mm (approx.)
<b>Weight</b>	180gms Including Battery (approx.)
<b>Accessories</b>	Supplied with Pair of Test Leads, Battery (installed), Instruction Manual & Holster

3½ Digit 2,000 Count LCD 17mm Large LCD, Audible Continuity, Diode & hFE Test Ranges	
<b>DC Voltage</b>	200mV/2/20/200/1000V
Accuracy	± (0.5%rdg + 1dgt) on all ranges
<b>AC Voltage</b>	200mV/2/20/200/750V (50-500Hz)
Accuracy	± (1%rdg + 4dgt) on all ranges except ± (1.5%rdg + 4dgt) on 750V
<b>DC Current</b>	200µA/2mA/20mA/ 200mA/20A
Accuracy	± (1%rdg + 1dgt) on all ranges except ± (2%rdg + 3dgt) on 20A
<b>AC Current</b>	200µA/2mA/20mA/ 200mA/20A (50-500Hz)
Accuracy	± (1.2%rdg + 4dgt) on all ranges except ± (2%rdg + 4dgt) on 20A
<b>Resistance</b>	200Ω/2kΩ/20kΩ/200kΩ/ 2000kΩ/20MΩ/200MΩ
Accuracy	± (0.8%rdg + 1dgt) on all ranges, except ± (1%rdg + 3dgt) on 200Ω ± (3%rdg + 3dgt) on 20MΩ ± (5%rdg + 10dgt) on 200MΩ
<b>Sp. Function</b>	Audible Continuity, Diode Check, hFE Test
<b>Power</b>	One 9V battery
<b>Low Battery</b>	"  " is indicated
<b>Battery Life</b>	200 hours typical
<b>Dimensions</b>	170 x 80 x 43mm (approx.)
<b>Weight</b>	240gms Including Battery (approx.)
<b>Accessories</b>	Supplied with Pair of Test Leads, Carrying Case, Battery (installed), Instruction Manual and Spare Fuse


4½ Digit 20,000 Counts, Large LCD, Capacitance, Frequency, hFE, Infrared Remote Control Check, Live Wire Check, APO Ranges	
<b>DC Voltage</b>	200mV/2/20/200/1000V
Accuracy	± (0.05%rdg + 5dgt) on all ranges except ± (0.1%rdg + 5dgt) on 1000V
<b>AC Voltage</b>	200mV/2/20/200/750V
Accuracy	± (0.8%rdg + 10dgt) on all ranges except ± (1.0%rdg + 15dgt) on 750V
<b>DC Current</b>	2mA/20/200mA/20A
Accuracy	± (0.5%rdg + 5dgt) on 2/20mA ± (0.8%rdg + 5dgt) on 200mA ± (2.0%rdg + 10dgt) on 20A
<b>AC Current</b>	20/200mA/20A
Accuracy	± (0.8%rdg + 10dgt) on 20/200mA ± (3%rdg + 10dgt) on 20A
<b>Resistance</b>	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.4%rdg + 5dgt) on all ranges except ± (0.8%rdg + 5dgt) on 20MΩ
<b>Capacitance</b>	20/200nF/2/200µF
Accuracy	± (3%rdg + 10dgt) on all ranges except ± (5%rdg + 10dgt) on 200µF
<b>Frequency</b>	20kHz
Accuracy	± (1.5%rdg + 5dgt)
<b>Sp. Function</b>	Diode, Continuity, Data Hold, hFE, Capacitance, Hz, Infrared Remote Control Check, Live Wire Check, APO
<b>Power</b>	One 9V battery
<b>Low Battery</b>	"  " Indicated
<b>Battery Life</b>	150 hours typical
<b>Dimensions</b>	182 x 90 x 60 mm (approx.)
<b>Weight</b>	365gms Including Battery (app.)
<b>Accessories</b>	Supplied with Pair of Test Leads, Battery (installed), Inst. Manual & Holster



9A09



9A06

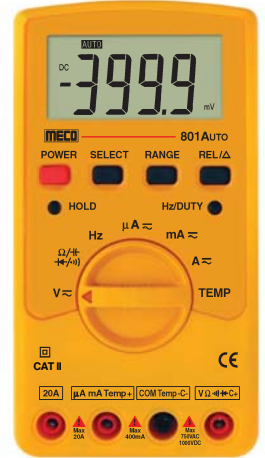

801AUTO

**3½ Digit, 2,000 Count LCD, Auto Ranging, Data Hold, Temperature & APO**

**Ranges**

<b>DC Voltage</b>	200mV/2/20/200/600V
Accuracy	± (0.5%rdg + 4dgt) on 200mV & 2V, ± (0.7%rdg + 4dgt) on 20V & 200V, ± (1%rdg + 4dgt) on 600V
<b>AC Voltage</b>	2/20/200/600V
Accuracy	± (1.0%rdg + 8dgt) on all ranges except ± (1.5%rdg + 8dgt) on 600V
<b>DC Current</b>	200/2000µA/20/200mA/2/10A
Accuracy	± (1.5%rdg + 4dgt)
<b>AC Current</b>	200/2000µA/20/200mA/2/10A
Accuracy	± (2.2%rdg + 4dgt)
<b>Resistance</b>	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.7%rdg + 4dgt) on all ranges except ± (1.2%rdg + 4dgt) on 2MΩ ± (2.5%rdg + 4dgt) on 20MΩ
<b>Temperature</b>	-20°C ~ 1300°C/-4°F ~ 1999°F
Accuracy	± (2%rdg + 4dgt)
<b>Sp. Function</b>	Diode Test, Audible Continuity, Data Hold
<b>Power</b>	Two 1.5V 'AAA' Battery
<b>Low Battery</b>	"" Indicated
<b>Battery Life</b>	200 hours typical
<b>Dimensions</b>	150 x 80 x 33 mm (approx.)
<b>Weight</b>	140gms Including Battery (approx.)
Measuring Category	CAT II
<b>Accessories</b>	Supplied with Pair of Test Leads, Battery (installed), Instruction Manual & <b>Holster</b> <b>Optional</b> : K Type Thermocouple (upto 260°C)

**Auto / Manual, 3½ Digit, 2,000 Count LCD, APO & Temperature**

**Ranges**

<b>DC Voltage</b>	200mV/2/20/200/1000V
Accuracy	± (0.5%rdg + 4dgt) on 200mV & 2V, ± (0.7%rdg + 4dgt) on 20V & 200V, ± (1%rdg + 4dgt) on 1000V
<b>AC Voltage</b>	200mV/2/20/200/750V (200mV Manual only)
Accuracy	± (1.0%rdg + 8dgt) on all ranges except ± (1.5%rdg + 8dgt) on 750V
<b>DC Current</b>	200/2000µA/20/200mA/2/10A
Accuracy	± (1.5%rdg + 4dgt)
<b>AC Current</b>	200/2000µA/20/200mA/2/10A
Accuracy	± (2.2%rdg + 4dgt)
<b>Resistance</b>	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.7%rdg + 4dgt) on all ranges except ± (1.2%rdg + 4dgt) on 2MΩ ± (2.5%rdg + 4dgt) on 20MΩ
<b>Temperature</b>	-20°C ~ 1300°C/-4°F ~ 1999°F
Accuracy	± (2%rdg + 4dgt)
<b>Sp. Function</b>	Diode Test, Audible Continuity, Data Hold
<b>Power</b>	Two 1.5V 'AA' Battery
<b>Low Battery</b>	"" Indicated
<b>Battery Life</b>	200 hours typical
<b>Dimensions</b>	161 x 86 x 43 mm (approx.)
<b>Weight</b>	250gms Including Battery (approx.)
Measuring Category	CAT II
<b>Accessories</b>	Supplied with Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case

**Auto / Manual, 3¾ Digit, 4,000 Count LCD, APO, Capacitance, Frequency, Duty Cycle & Temperature**

**Ranges**

<b>DC Voltage</b>	400mV/4/40/400/1000V
Accuracy	± (0.5% rdg + 4 dgt) on 400mV/4V ± (0.7% rdg + 4 dgt) on 40/400V ± (1.0% rdg + 4 dgt) on 1000V
<b>AC Voltage</b>	4/40/400/750V
Accuracy	± (1.0% rdg + 5 dgt) on all ranges except ± (1.5% rdg + 8 dgt) on 750V
<b>DC Current</b>	400/4000µA/40/400mA/4/20A
Accuracy	± (1.5% rdg + 4 dgt)
<b>AC Current</b>	400/4000µA/40/400mA/4/20A
Accuracy	± (2.2% rdg + 4 dgt)
<b>Resistance</b>	400Ω/4/40/400kΩ/4/40MΩ
Accuracy	± (0.7% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 4MΩ ± (2.5% rdg + 4 dgt) on 40MΩ
<b>Capacitance</b>	40/400nF/4/40/100µF
Accuracy	± (5.0% rdg + 10 dgt)
<b>Frequency</b>	9.999Hz ~ 9.999MHz
Accuracy	± (0.5% rdg + 2 dgt)
<b>Duty Cycle</b>	0.1% ~ 99.9%
Accuracy	± (0.5% rdg + 2 dgt)
<b>Temperature</b>	-20°C ~ 1300°C
Accuracy	± (2% rdg + 4 dgt)
<b>Sp. Function</b>	Diode Test, Audible Continuity, Data Hold
<b>Power</b>	Two 1.5V 'AA' Battery
<b>Low Battery</b>	"" is indicated
<b>Battery Life</b>	200 hours typical
<b>Dimensions</b>	161 x 86 x 43 mm (approx.)
<b>Weight</b>	250gms Including Battery (approx.)
Measuring Category	CAT II
<b>Accessories</b>	Supplied with Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case